

Neusilin® S2

Technical Data Sheet

www.neusilin.com

Neusilin® - The Specialty Excipient

A synthetic magnesium aluminometasilicate (MAS) with exceptional excipient properties for improving actives delivery and quality of pharmaceutical preparations. Although chemically the same as traditional crystalline MAS, Neusilin® is both structurally and functionally a very different product that serves a multitude of purposes when compared to other silicates.

Key Features

- Stabilizer
- Improves tablet and powder capsule quality
- Compact tablets with relevant hardness

General Properties

Grade	S2	
Chemical formula	$Al_2O_3 \cdot MgO \cdot 1.7SiO_2 \cdot xH_2O$	
General name	Magnesium Aluminometasilicate	
Appearance	White granule	
Form	Amorphous	
Solubility	Practically insoluble in water and ethanol	
Composition (%) on dried basis	Al_2O_3	29.1 - 35.5
	MgO	11.4 - 14.0
	SiO_2	29.2 - 35.6
Degree of whiteness	> 95	
Loss on drying 110°C/7hrs (%)	< 5	
Bulk density	Loose (g/ml)	0.29 - 0.37
	Tapped (g/ml)	0.34 - 0.42
True specific gravity	2.2	
Specific surface area (m ² /g)	110	
Average particle size (µm)	115	
Angle of repose (°)	30	
Oil adsorbing capacity (ml/g)	1.4	
Water adsorbing capacity (ml/g)	1.2	
Acid consuming capacity (ml/g)	≥ 210	
Ph 4% slurry	8.5 - 10.0	

Typical Application and Quantity Required

Application / function	Quantity (%)
Excipient / diluent	30 - 90
Tablet - binder, disintegration aid, increase hardness	1 - 10

Pharmacopoeia & Regulatory


Neusilin® meets all requirements of the current USP/NF and JPC. US DMF Type IV filed in 1998.

Handling & Storage

Packaging: 20 kg double-lined Kraft bags

Storage: Store at room temperature and avoid high humidity.

Shelf life: 3 years from the date of manufacture stored in recommended conditions.

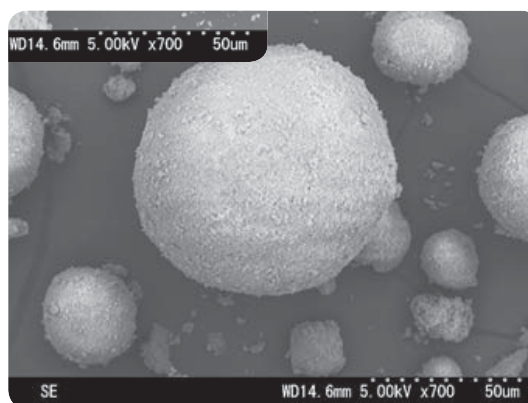

Neusilin® S2 (x700)



Fuji Chemical Industries USA, Inc.

3 Terri Lane, Unit 12, Burlington, NJ 08016

Tel: 609-386-3030 Fax: 609-386-3033

www.fujichemicalUSA.com contact@fujichemicalUSA.com

Information found is presented in good faith with no guarantee or obligation as to accuracy and no assumption of liability. The information herein does not imply a performance warranty. Purchasers should decide the suitability of the product with respect to their desired application and purpose. Standard specifications and product grades, although current at the time of publication, are subject to change without notice.